




Cod: 80TR...

Descrizione

- Tronchetto flangiato con flange mobili
- Rivestimento epossidico a polvere
- Verniciatura RAL 5010
- Disponibile con foratura PN10/16

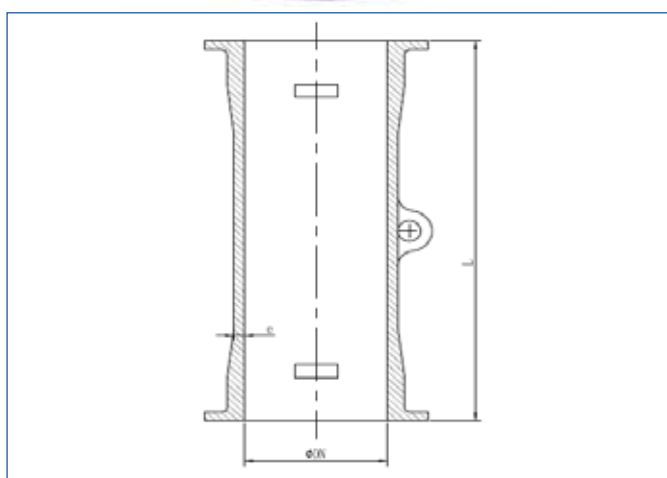

Standards

- Conforme alla EN 545
- Conforme al D.M. 174

Tabella dimensionale

DN	e	L									
		100	150	200	250	300	400	500	600	800	1000
40	7	100	150	200	250	300	400	500			
50	7	100	150	200	250	300	400	500			
60	7	100	150	200	250	300	400	500			
65	7	100	150	200	250	300	400	500	600		
80	7	100	150	200	250	300	400	500	600	800	1000
100	7,2	100	150	200	250	300	400	500	600	800	1000
125	7,5	100	150	200	250	300	400	500	600	800	1000
150	7,8	100	150	200	250	300	400	500	600	800	1000
200	8,4	100	150	200	250	300	400	500	600	800	1000
250	9	100	150	200	250	300	400	500	600	800	1000
300	9,6	100	150	200	250	300	400	500	600	800	1000
350	10. 2				250	300	400	500	600	800	1000
400	10,8				250	300	400	500	600	800	1000
450	11. 4				250	300	400	500	600	800	1000
500	12				250	300	400	500	600	800	1000
600	13,2				250	300	400	500	600	800	1000