


**Cod: 80CUR22...**

## Descrizione

- Curva flangiata a 22° con flange mobili
- Rivestimento epossidico a polvere
- Verniciatura RAL 5010
- Disponibile con foratura PN10/PN16

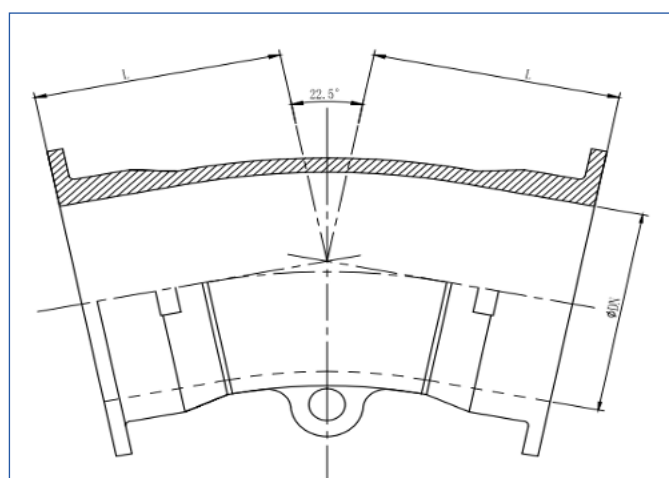

## Standards

- Conforme alla EN 545
- Conforme al D.M. 174

## Tabella dimensionale

DN	L (mm)	e (mm)
40	94	7
50	104	7
60	114	7
65	119	7
80	105	7
100	110	7,2
125	105	7,5
150	109	7,8
200	131	8,4
250	190	9
300	210	9,6
350	210	10,2
400	239	10,8
450	349	11,4
500	375	12
600	426	13,2